




参数实测

DT9-BF- I 性能曲线图

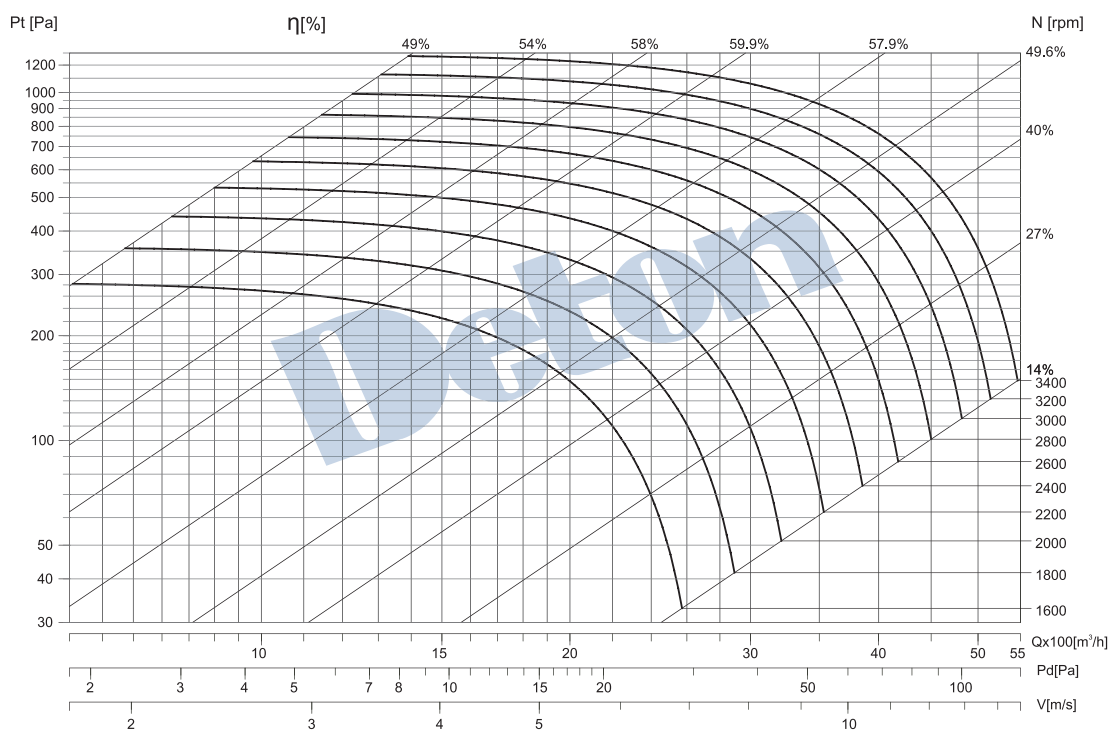


DT9-BF- I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	2000	1	909	438	435	61.6	0.37kW	ZBA6322
		2	1273	419	412	61.4		
		3	1636	384	372	61.9		
		4	2000	331	314	62.7		
		5	2364	261	237	63.5		
		6	2727	178	146	63.7		
2	2400	1	1091	631	626	65.6	0.55kW	ZBA6332
		2	1527	604	594	65.4		
		3	1964	553	536	65.8		
		4	2400	476	452	66.7		
		5	2836	376	341	67.5		
		6	3273	256	210	67.6		
3	2600	1	1182	741	735	67.3	0.75kW	Y80 ₁ -2
		2	1655	709	697	67.1		
		3	2127	649	629	67.6		
		4	2600	559	530	68.4		
		5	3073	441	401	69.2		
		6	3545	300	246	69.4		
4	3000	1	1364	986	978	70.4	1.1kW	Y80 ₂ -2
		2	1909	944	928	70.2		
		3	2455	864	838	70.7		
		4	3000	744	706	71.5		
		5	3545	588	533	72.3		
		6	4091	400	327	72.5		
5	3200	1	1455	1122	1113	71.8	1.5kW	Y90S-2
		2	2036	1074	1056	71.6		
		3	2618	983	953	72.1		
		4	3200	847	803	72.9		
		5	3782	669	607	73.7		
		6	4364	455	373	73.9		

拒绝虚假



DT10-BF-I 性能曲线图

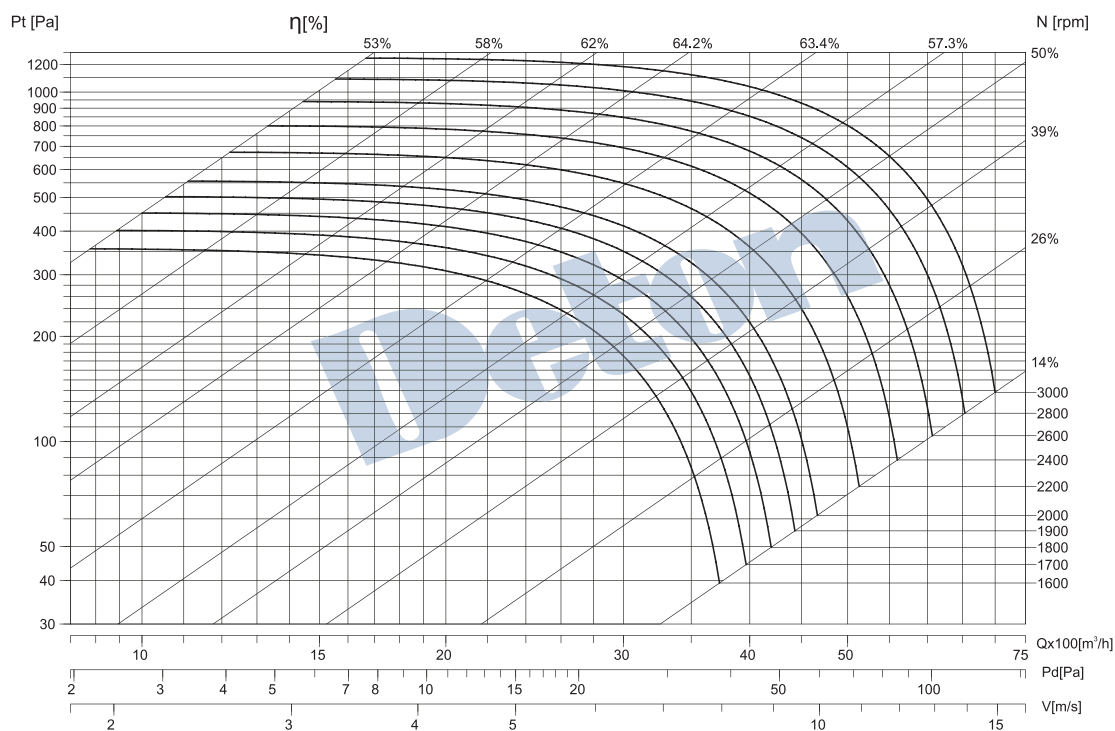

DT10-BF-I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	2100	1	1400	610	605	69.3	0.75kW	Y80L-2
		2	2100	580	568	69.4		
		3	2800	508	487	70		
		4	3267	436	407	70.5		
		5	3733	346	308	70.9		
		6	4433	185	131	70.3		
2	2400	1	1600	797	790	72.2	1.1kW	Y80L-2
		2	2400	757	742	72.3		
		3	3200	664	636	72.9		
		4	3733	570	532	73.4		
		5	4267	452	403	73.8		
		6	5067	242	172	73.2		
3	2700	1	1800	1009	1000	74.7	1.5kW	Y90S-2
		2	2700	958	939	74.9		
		3	3600	840	805	74.5		
		4	4200	721	673	75.9		
		5	4800	572	510	86.3		
		6	5700	306	217	75.7		
4	3100	1	2067	1330	1319	77.7	2.2kW	Y90L-2
		2	3100	1263	1237	77.9		
		3	4133	1107	1061	78.5		
		4	4822	950	887	78.9		
		5	5511	755	672	79.3		
		6	6544	403	286	78.7		
5	3200	1	2133	1417	1405	78.4	3kW	Y100L-2
		2	3200	1346	1318	78.5		
		3	4267	1180	1130	79.1		
		4	4978	1012	945	79.6		
		5	5689	804	716	80		
		6	6756	430	305	79.4		

DT-BF 系列



参数实测

DT12-BF-I 性能曲线图

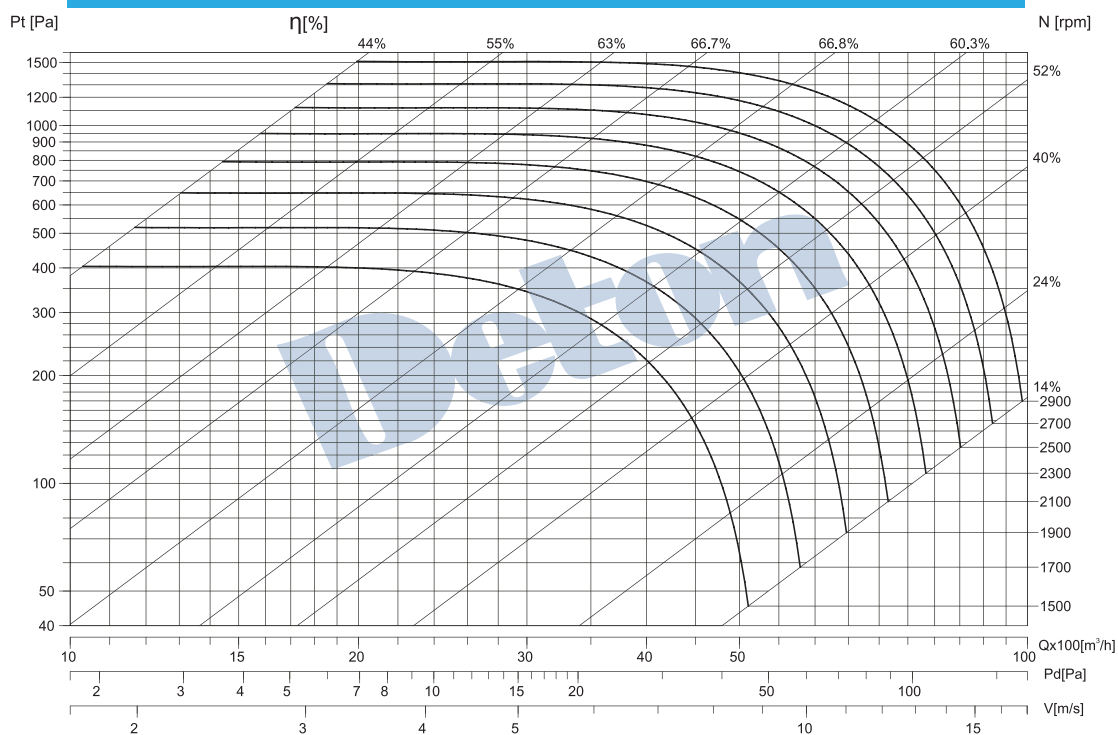


DT12-BF-I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	1700	1	1545	518	514	63.1	0.75kW	Y80 ₂ -4
		2	2318	513	503	62.4		
		3	2705	497	485	62.5		
		4	3477	432	411	63.3		
		5	4250	329	297	64.5		
		6	5023	201	157	65		
2	2000	1	1818	717	712	66.6	1.1kW	Y80 ₂ -2
		2	2727	710	697	64.9		
		3	3182	688	671	66		
		4	4091	599	570	66.8		
		5	5000	455	412	68		
		6	5909	279	218	68.5		
3	2200	1	2000	868	861	68.7	1.5kW	Y90S-2
		2	3000	859	843	68		
		3	3500	833	812	68.1		
		4	4500	824	689	68.9		
		5	5500	550	498	70		
		6	6500	337	264	70.6		
4	2500	1	2273	1121	1112	71.4	2.2kW	Y90L-2
		2	2841	1121	1107	70.9		
		3	3977	1075	1048	70.8		
		4	5114	935	890	71.7		
		5	6250	435	643	72.8		
		6	7386	285	340	73.3		
5	2800	1	2545	1406	1395	73.9	3kW	Y100L-2
		2	3818	1391	1365	73.2		
		3	4455	1349	1315	73.3		
		4	5727	1173	1116	74.1		
		5	7000	892	807	75.3		
		6	8273	546	427	75.8		
6	3000	1	2727	1614	1601	75.4	4kW	Y112M-2
		2	4091	1596	1567	74.7		
		3	4773	1549	1509	74.8		
		4	6136	1347	1281	75.6		
		5	7500	1024	926	76.8		
		6	8864	627	490	77.3		

拒绝虚假



DT14-BF- I 性能曲线图

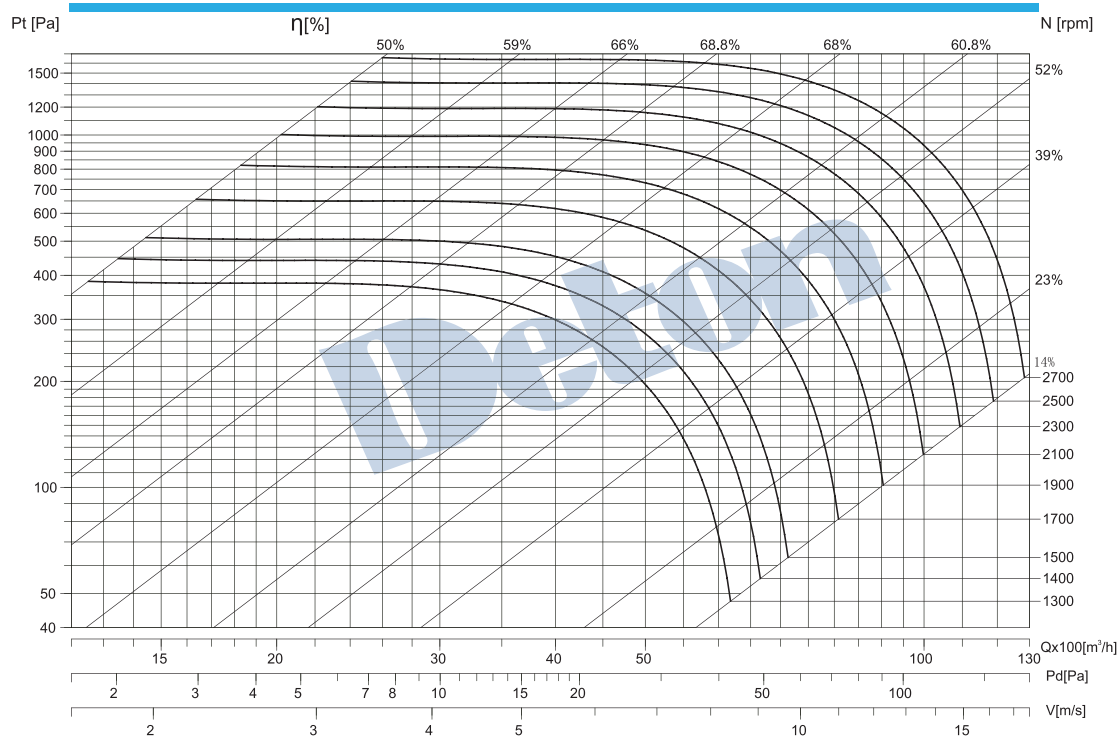

DT14-BF- I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	1600	1	1541	582	580	67.2	1.1kW	Y90S-4
		2	2370	576	569	66.3		
		3	2963	573	564	66.2		
		4	4148	524	505	66.6		
		5	5333	405	373	67.5		
		6	6519	245	198	67.9		
2	1800	1	1733	737	734	69.8	1.5kW	Y90L-4
		2	2667	729	721	68.9		
		3	3333	726	713	68.7		
		4	4667	663	639	69.1		
		5	6000	513	473	70.1		
		6	7333	310	250	70.5		
3	2000	1	1926	910	906	72.1	2.2kW	Y90L-2
		2	2963	899	890	71.2		
		3	3704	896	880	71		
		4	5185	818	788	71.4		
		5	6667	633	584	72.4		
		6	8148	383	309	72.8		
4	2300	1	2215	1203	1198	75.1	3kW	Y100L-2
		2	3407	1189	1177	74.2		
		3	4259	1185	1164	74		
		4	5963	1082	1043	74.4		
		5	7667	837	772	75.4		
		6	9370	506	409	75.8		
5	2500	1	2407	1422	1415	76.9	4kW	Y112M-2
		2	3704	1405	1390	76		
		3	4630	1399	1376	75.8		
		4	6481	1278	1232	76.3		
		5	8333	989	912	77.2		
		6	10185	598	483	77.6		
6	2800	1	2696	1783	1775	79.4	5.5kW	Y132S1-2
		2	4148	1763	1744	78.5		
		3	5185	1755	1726	78.3		
		4	7259	1603	1545	78.7		
		5	9333	1240	1144	79.7		
		6	11407	750	606	80.1		

DT-BF 系列



参数实测

DT15-BF-I 性能曲线图

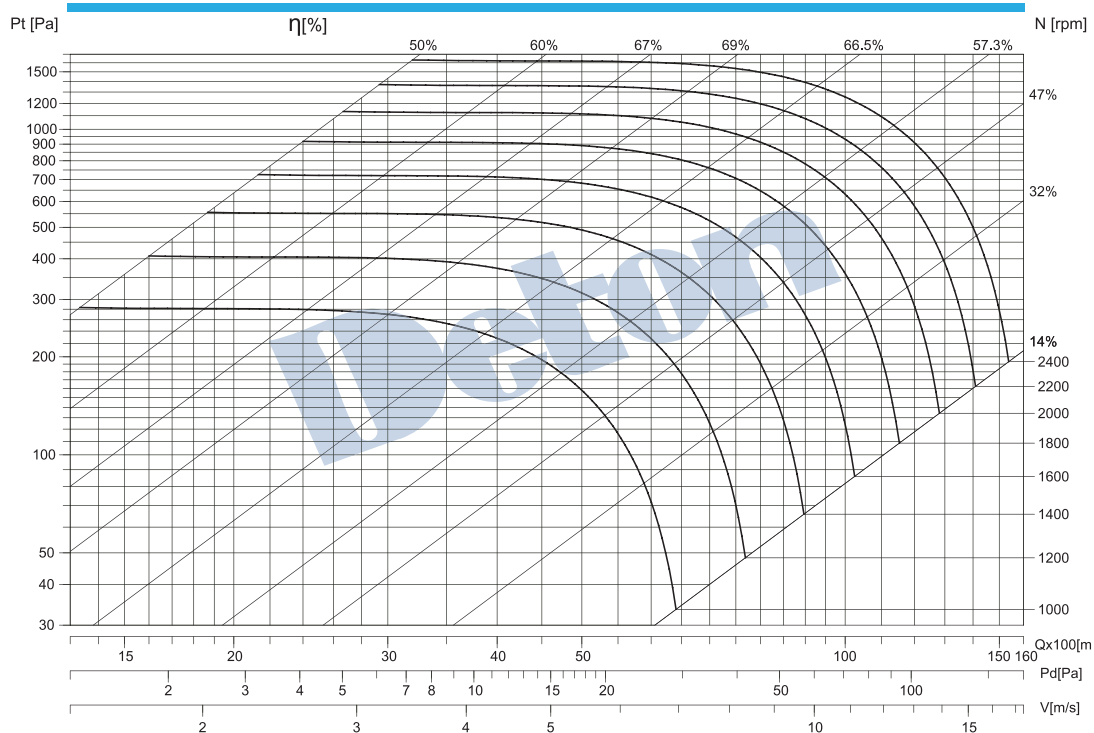


DT15-BF-I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m^3/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	1300	1	1625	481	479	65.6	1.1kW	Y90S-4
		2	2708	475	470	64.5		
		3	3792	460	450	64.3		
		4	4875	409	392	64.7		
		5	5958	321	296	65.3		
		6	7042	208	173	65.3		
2	1500	1	1875	640	637	68.8	1.5kW	Y90L-4
		2	3125	632	625	67.6		
		3	4375	612	599	67.4		
		4	5625	544	522	68.1		
		5	6875	427	394	68.4		
		6	8125	277	231	68.4		
3	1700	1	2125	822	819	71.5	2.2kW	Y100L ₁ -4
		2	3542	812	803	70.3		
		3	4958	786	769	70.1		
		4	6375	699	670	70.5		
		5	7792	548	506	71.1		
		6	9208	356	296	71.1		
4	1900	1	2375	1027	1023	73.9	3kW	Y100L-2
		2	3958	1015	1003	72.8		
		3	5542	982	960	72.5		
		4	7125	873	837	72.9		
		5	8708	685	632	73.5		
		6	10292	445	370	73.6		
5	2100	1	2625	1254	1249	76.1	4kW	Y112M-2
		2	4375	1239	1226	74.9		
		3	6125	1200	1173	74.7		
		4	7875	1066	1022	75.1		
		5	9625	837	772	75.7		
		6	11375	544	452	75.7		
6	2300	1	2875	1504	1498	78	5.5kW	Y132S ₁ -2
		2	4792	1487	1470	76.9		
		3	6708	1439	1407	76.7		
		4	8625	1279	1226	77.1		
		5	10542	1004	925	77.7		
		6	12458	652	543	77.7		

拒绝虚假



DT18-BF-I 性能曲线图

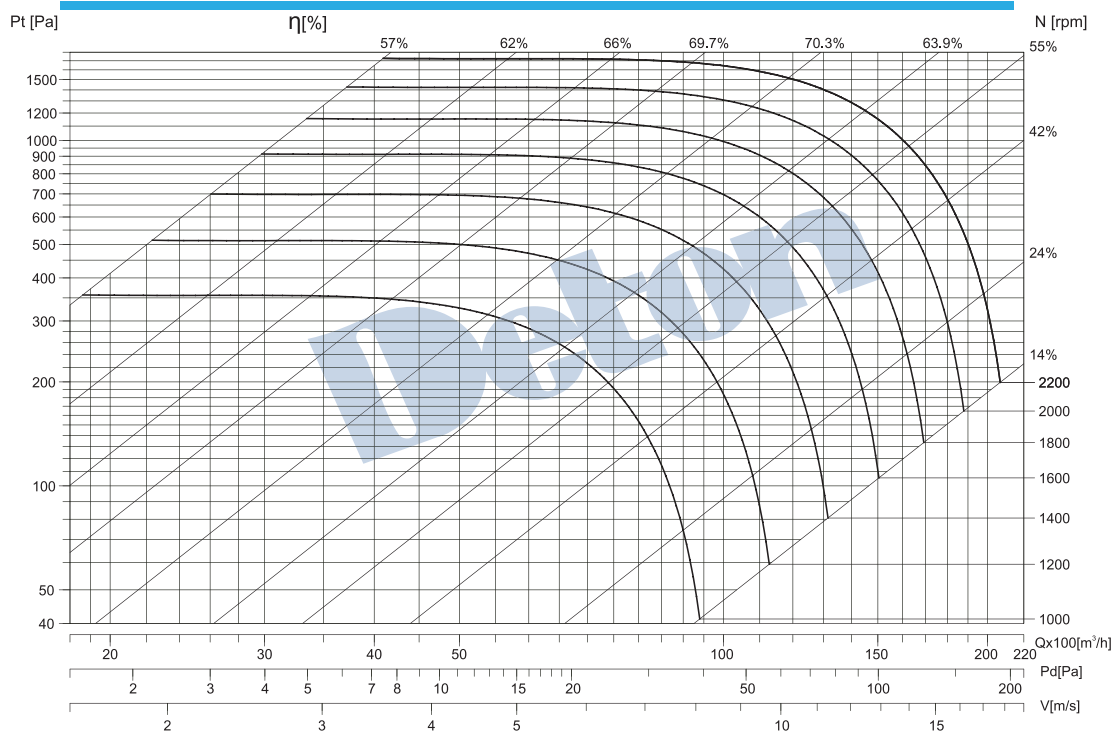

DT18-BF-I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	1200	1	2000	516	514	66.4	1.5kW	Y90L-4
		2	3333	513	508	65.4		
		3	4667	506	496	65.2		
		4	6000	471	455	65.7		
		5	8000	357	328	67.1		
		6	9333	246	207	67.9		
2	1400	1	2333	702	700	69.8	2.2kW	Y100L1-4
		2	3889	698	691	68.7		
		3	5444	688	675	68.5		
		4	7000	641	620	69		
		5	9333	485	447	70.4		
		6	10889	335	282	71.3		
3	1600	1	2667	917	914	72.7	3kW	Y100L2-4
		2	4444	911	903	71.6		
		3	6222	899	881	71.4		
		4	8000	838	809	71.9		
		5	10667	634	583	73.3		
		6	12444	438	369	74.2		
4	1700	1	2833	1035	1032	74	4kW	Y112M-4
		2	4722	1029	1019	73		
		3	6611	1015	995	72.8		
		4	8500	946	914	73.2		
		5	11333	716	659	74.6		
		6	13222	494	416	75.5		
5	1900	1	3167	1293	1289	76.4	5.5kW	Y132S1-2
		2	5278	1285	1273	75.4		
		3	7389	1267	1243	75.2		
		4	9500	1181	1141	75.6		
		5	12667	894	823	77.1		
		6	14778	617	520	77.9		
6	2100	1	3500	1580	1574	78.6	7.5kW	Y132S2-2
		2	5833	1570	1555	77.6		
		3	8167	1548	1518	77.4		
		4	10500	1443	1394	77.8		
		5	14000	1092	1005	79.2		
		6	16333	754	635	80.1		

DT-BF 系列



参数实测

DT20-BF-I 性能曲线图

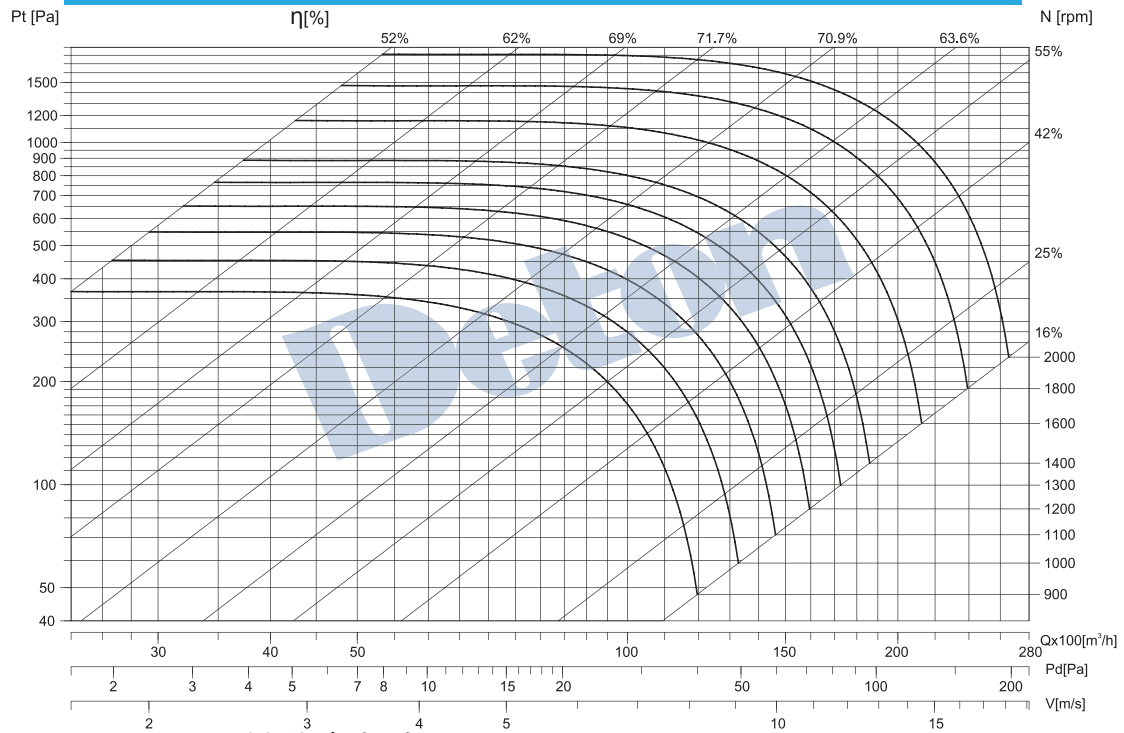


DT20-BF-I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	1100	1	2444	551	550	69.6	2.2kW	Y100L1-4
		2	3667	547	544	68.1		
		3	6111	537	526	67.5		
		4	8556	468	448	68.6		
		5	11000	338	304	70		
		6	12222	257	215	70.3		
2	1300	1	2889	770	768	73.3	3kW	Y100L2-4
		2	4333	764	759	71.8		
		3	7222	750	735	71.1		
		4	10111	654	625	72.1		
		5	13000	472	425	73.7		
		6	14444	358	300	74		
3	1400	1	3111	893	891	74.9	4kW	Y112M-4
		2	4667	887	881	73.4		
		3	7778	869	852	72.7		
		4	10889	758	725	73.8		
		5	14000	547	492	75.3		
		6	15556	416	348	75.6		
4	1600	1	3556	1167	1163	77.8	5.5kW	Y132S-4
		2	5333	1158	1150	76.3		
		3	8889	1136	1113	75.6		
		4	12444	990	947	76.7		
		5	16000	715	643	78.2		
		6	17778	543	454	78.5		
5	1700	1	3778	1317	1313	79.1	7.5kW	Y132M-4
		2	5667	1307	1298	77.6		
		3	9444	1282	1257	76.9		
		4	13222	1118	1069	78.1		
		5	17000	807	726	79.5		
		6	18889	613	513	79.8		
6	2000	1	4444	1823	1817	82.6	11kW	Y160M1-2
		2	6667	1809	1797	81.1		
		3	11111	1774	1740	80.5		
		4	15556	1547	1480	81.6		
		5	20000	1117	1005	83		
		6	22222	848	710	83.3		

拒绝虚假



DT22-BF-I 性能曲线图

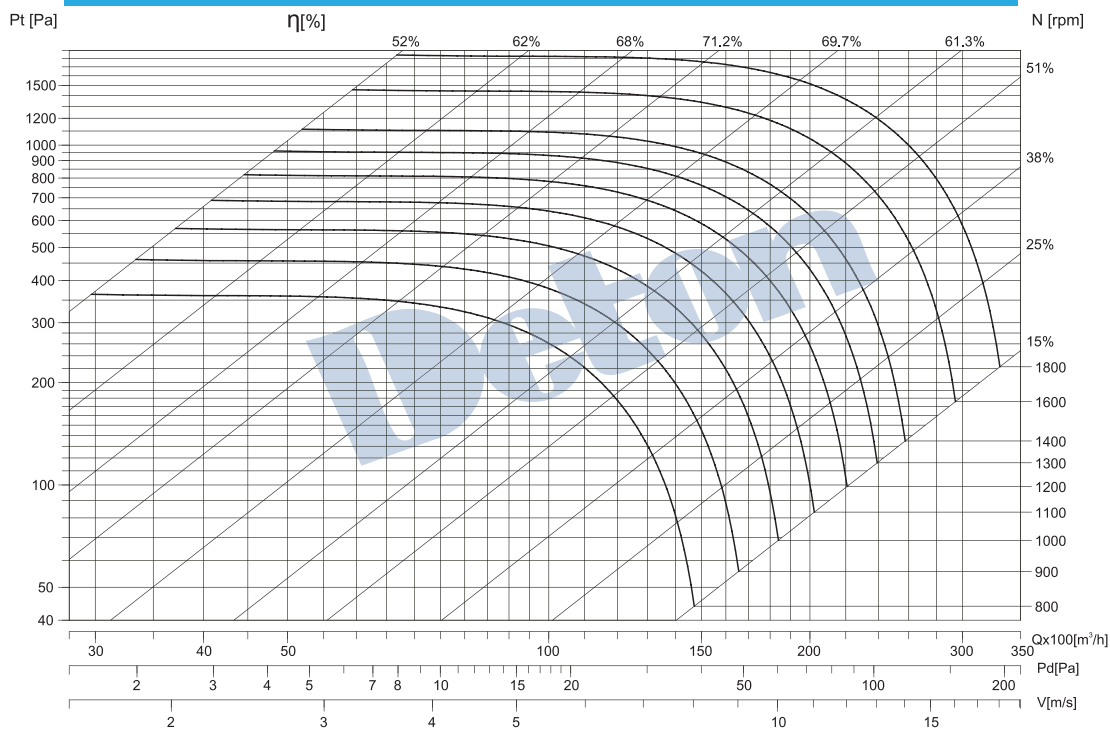

DT22-BF-I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	950	1	3527	513	511	69.3	2.2kW	Y100L1-4
		2	4750	509	505	68.3		
		3	7125	500	491	67.6		
		4	9500	456	440	68.1		
		5	11875	368	343	69.2		
		6	14250	250	214	70.1		
2	1100	1	4084	688	685	72	3kW	Y100L2-4
		2	5500	682	677	71		
		3	8250	670	658	70.3		
		4	11000	611	590	70.8		
		5	13750	494	460	71.9		
		6	16500	335	287	72.8		
3	1200	1	4455	819	815	73.8	4kW	Y112M-4
		2	6000	812	806	72.9		
		3	9000	798	783	72.2		
		4	12000	727	702	72.7		
		5	15000	588	548	73.8		
		6	18000	399	341	74.7		
4	1300	1	4826	961	957	75.6	5.5kW	Y132S-4
		2	6500	953	945	74.6		
		3	9750	936	919	73.9		
		4	13000	854	824	74.4		
		5	16250	690	643	75.6		
		6	19500	468	401	76.4		
5	1400	1	5198	1115	1110	77.2	7.5kW	Y132M-4
		2	7000	1105	1096	76.2		
		3	10500	1086	1066	75.5		
		4	14000	990	955	76.1		
		5	17500	800	746	77.2		
		6	21000	543	465	78		
6	1700	1	6311	1643	1636	81.4	11kW	Y160M-4
		2	8500	1630	1617	80.1		
		3	12750	1601	1572	80.7		
		4	17000	1460	1408	80.3		
		5	21250	1180	1899	81.4		
		6	25500	801	685	82.2		
7	1800	1	6682	1843	1835	82.6	15kW	Y160L-4
		2	9000	1827	1813	81.7		
		3	13500	1795	1763	81		
		4	18000	1637	1579	81.5		
		5	22500	1323	1233	82.6		
		6	27000	898	768	83.5		

DT-BF 系列



参数实测


DT25-BF-I 性能曲线图

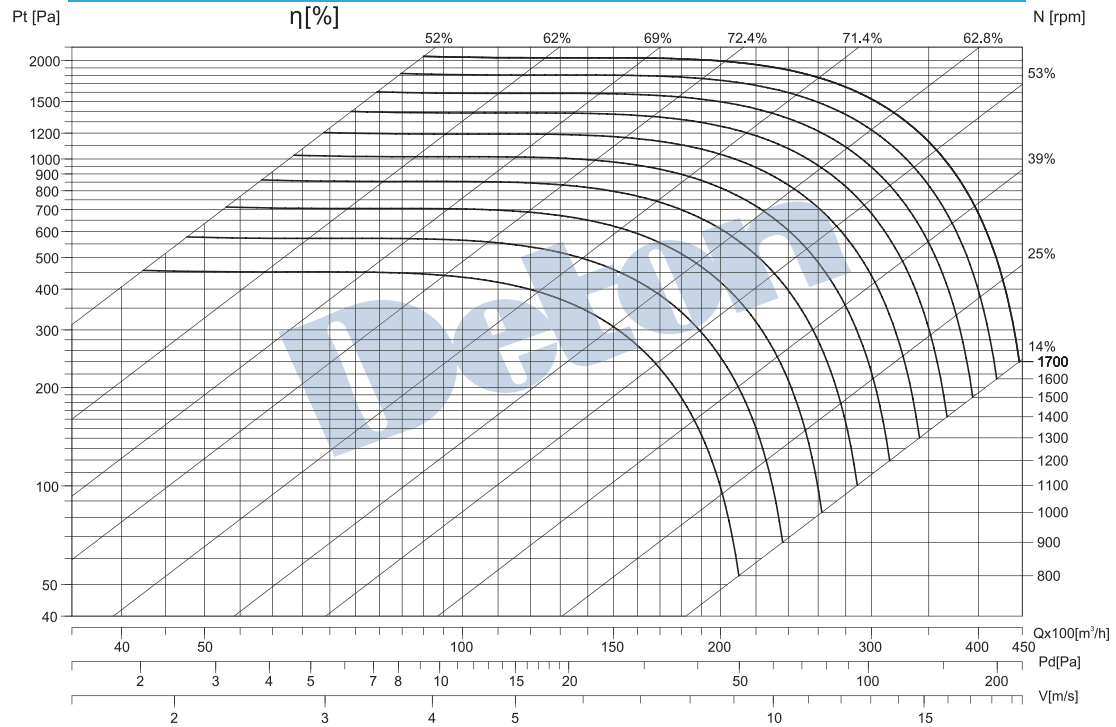

拒绝虚假



DT28-BF- I 性能曲线图

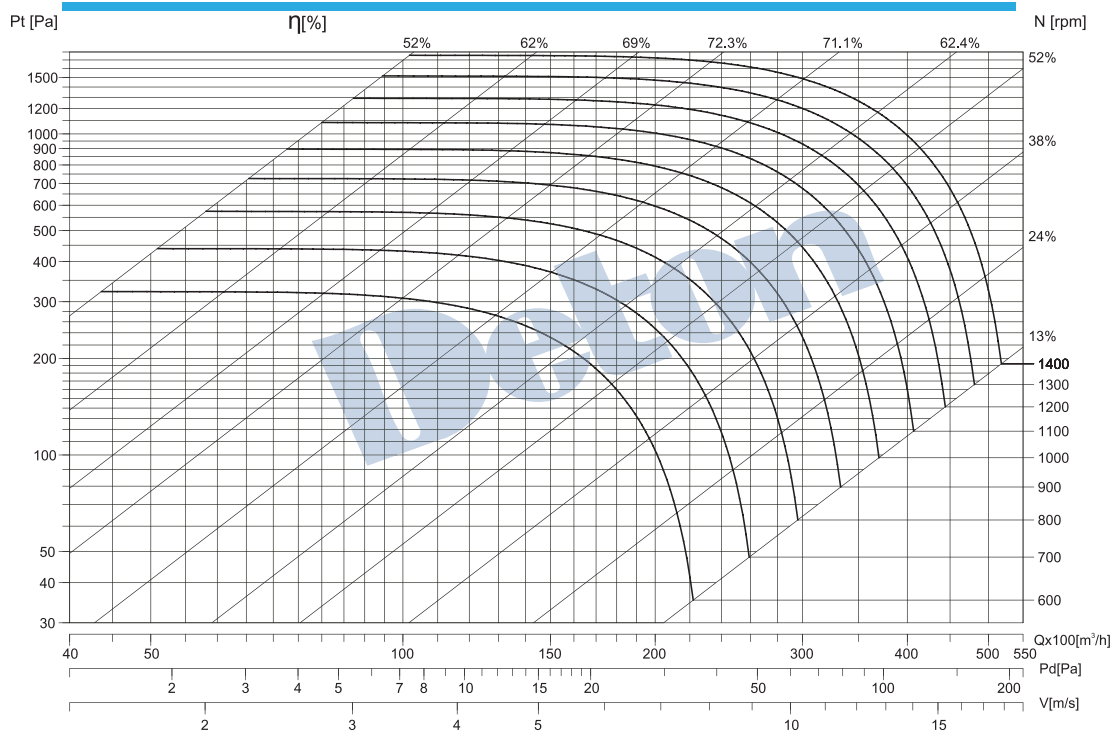

DT28-BF- I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m^3/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	800	1	5818	574	572	68.6	4kW	Y132M ₁ -6
		2	7273	573	569	68		
		3	11636	562	552	67.5		
		4	16000	508	490	68.2		
		5	20364	403	373	69.5		
		6	24727	257	214	70.5		
2	900	1	6545	726	723	71.1	5.5kW	Y132S-4
		2	8182	725	721	70.5		
		3	13091	711	699	70		
		4	18000	643	620	70.7		
		5	22909	510	472	72		
		6	27818	326	271	73		
3	1000	1	7273	897	893	73.4	7.5kW	Y132M-4
		2	9091	895	890	72.8		
		3	14545	878	863	72.2		
		4	20000	794	765	73		
		5	25455	629	583	74.3		
		6	30909	402	334	75.3		
4	1100	1	8000	1085	1081	75.5	11kW	Y160M-4
		2	10000	1084	1076	74.9		
		3	16000	1062	1044	74.3		
		4	22000	960	926	75		
		5	28000	761	705	76.4		
		6	34000	487	404	77.4		
5	1200	1	8727	1291	1286	77.4	15kW	Y160L-4
		2	10909	1289	1281	76.8		
		3	17455	1264	1243	76.2		
		4	24000	1143	1102	76.9		
		5	30545	906	839	78.3		
		6	37091	579	481	79.3		
6	1300	1	9455	1516	1509	79.1	18.5kW	Y180M-4
		2	11818	1513	1503	78.5		
		3	18909	1484	1458	77.9		
		4	26000	1341	1293	78.7		
		5	33091	1063	985	80		
		6	40182	679	564	81		
7	1400	1	10182	1758	1750	80.7	22kW	Y180L-4
		2	12727	1755	1744	80.1		
		3	20364	1721	1691	79.5		
		4	28000	1556	1500	80.3		
		5	35636	1233	1143	81.6		
		6	43273	788	655	82.6		

DT-BF 系列



参数实测

DT32-BF-I 性能曲线图

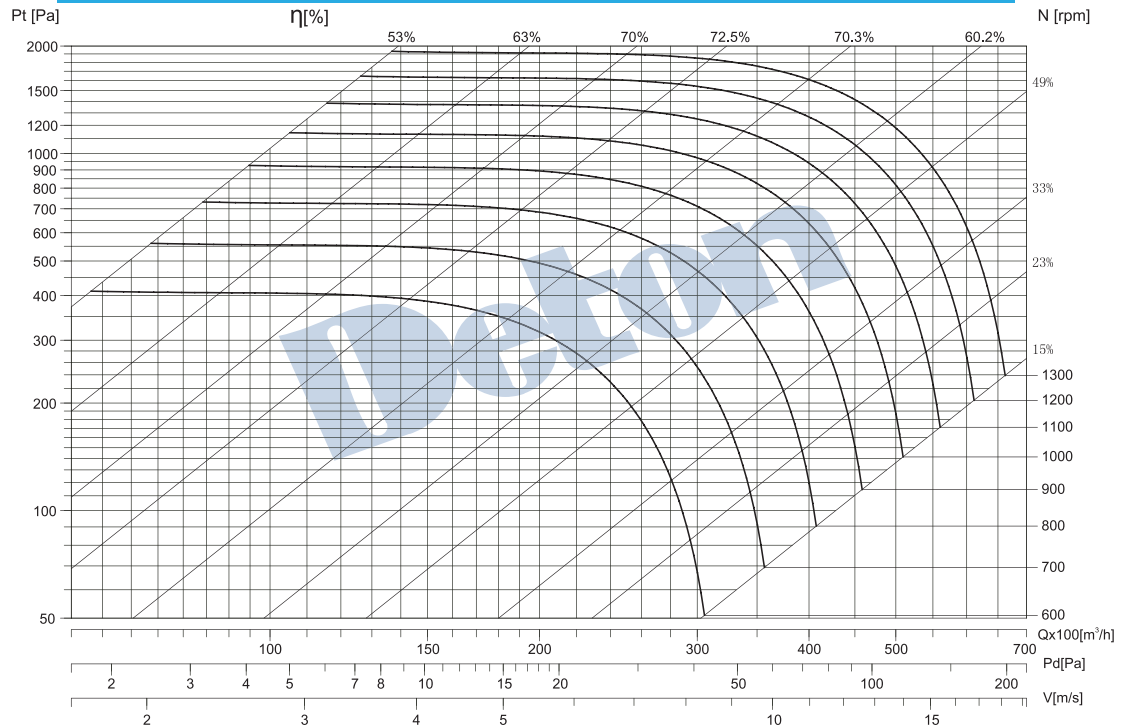


DT32-BF-I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	750	1	7892	643	640	70.5	7.5kW	Y160M-6
		2	10000	638	633	69.8		
		3	15000	629	619	69		
		4	20000	587	569	69.2		
		5	26666	453	421	70.5		
		6	33334	251	200	71.1		
2	800	1	8418	732	729	71.8	7.5kW	Y160M-6
		2	10667	726	721	71.1		
		3	16000	716	705	70.3		
		4	21333	668	648	70.5		
		5	28444	515	479	71.8		
		6	35556	285	228	72.4		
3	900	1	9470	926	922	74.4	11kW	Y160M-6
		2	12000	919	912	73.6		
		3	18000	906	892	72.8		
		4	24000	846	820	73.1		
		5	32000	652	606	74.3		
		6	40000	361	289	75		
4	1000	1	10522	1144	1139	76.7	15kW	Y160L-4
		2	13333	1134	1126	75.9		
		3	20000	1119	1101	75.1		
		4	26667	1044	1012	75.4		
		5	35556	805	748	76.6		
		6	44444	446	356	77.3		
5	1100	1	11574	1384	1378	78.7	18.5kW	Y180M-4
		2	14667	1372	1362	78		
		3	22000	1354	1332	77.2		
		4	29333	1263	1224	77.4		
		5	39111	974	905	78.7		
		6	48889	539	431	79.4		
6	1200	1	12627	1647	1640	80.6	22kW	Y180L-4
		2	16000	1633	1621	79.9		
		3	24000	1611	1585	79.1		
		4	32000	1503	1457	79.3		
		5	42667	1160	1077	80.6		
		6	53333	642	513	81.2		
7	1300	1	13679	1933	1924	82.4	30kW	Y200L-4
		2	17333	1916	1903	81.6		
		3	26000	1891	1860	80.8		
		4	34667	1764	1710	81.1		
		5	46222	1361	1264	82.3		
		6	57778	753	602	83		

拒绝虚假



DT36-BF-I 性能曲线图

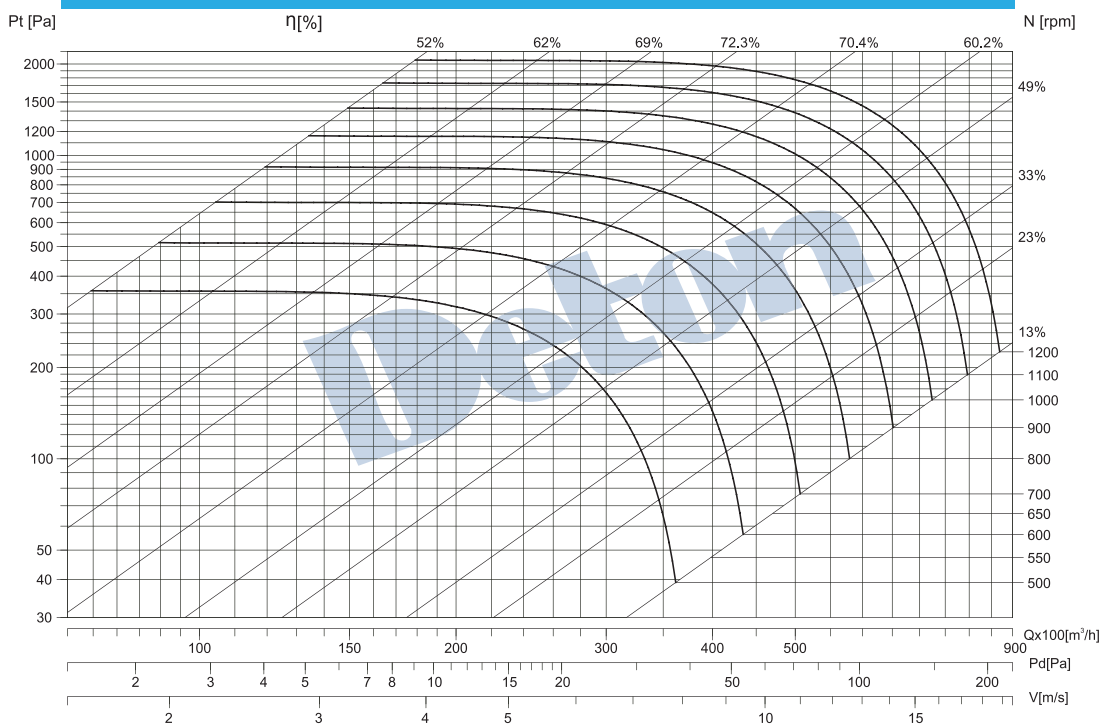

DT36-BF-I 性能参数表


序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	650	1	9700	605	603	68.5	7.5kW	Y160M-6
		2	14181	603	597	67.5		
		3	21273	582	569	67.4		
		4	28364	502	479	68.3		
		5	33091	415	384	69.2		
		6	40181	250	204	69.7		
2	850	1	12685	1035	1031	73.5	15kW	Y180L-6
		2	18545	1031	1021	72.5		
		3	27818	995	973	72.4		
		4	37091	859	820	73.3		
		5	43273	710	657	74.2		
		6	52545	427	349	74.7		
3	900	1	13431	1160	1155	74.7	18.5kW	Y180M-4
		2	19636	1156	1145	73.8		
		3	29455	1116	1091	73.6		
		4	39273	963	919	74.6		
		5	45818	796	736	75.8		
		6	55636	478	391	76.0		
4	950	1	14177	1293	1287	75.9	22kW	Y180L-4
		2	20727	1288	1276	75.0		
		3	31091	1243	1216	74.8		
		4	41455	1072	1024	75.7		
		5	48364	886	820	76.6		
		6	58727	533	436	77.4		
5	1050	1	15670	1579	1572	78.1	30kW	Y200L-4
		2	22909	1573	1558	77.1		
		3	34364	1519	1485	77.0		
		4	45818	1310	1251	77.9		
		5	53455	1083	1002	78.7		
		6	64909	651	532	79.3		
6	1150	1	17162	1895	1886	80.0	37kW	Y225S-4
		2	25091	1887	1869	79.1		
		3	37636	1822	1782	78.9		
		4	50182	1571	1500	79.9		
		5	58545	1299	1202	80.7		
		6	71091	781	638	81.3		
7	1200	1	17908	2063	2054	81.0	45kW	Y225M-4
		2	26182	2055	2035	80.0		
		3	39273	1984	1940	79.9		
		4	52364	1711	1634	80.8		
		5	61091	1414	1309	81.6		
		6	74182	851	695	82.2		

DT-BF 系列



参数实测

DT40-BF-I 性能曲线图

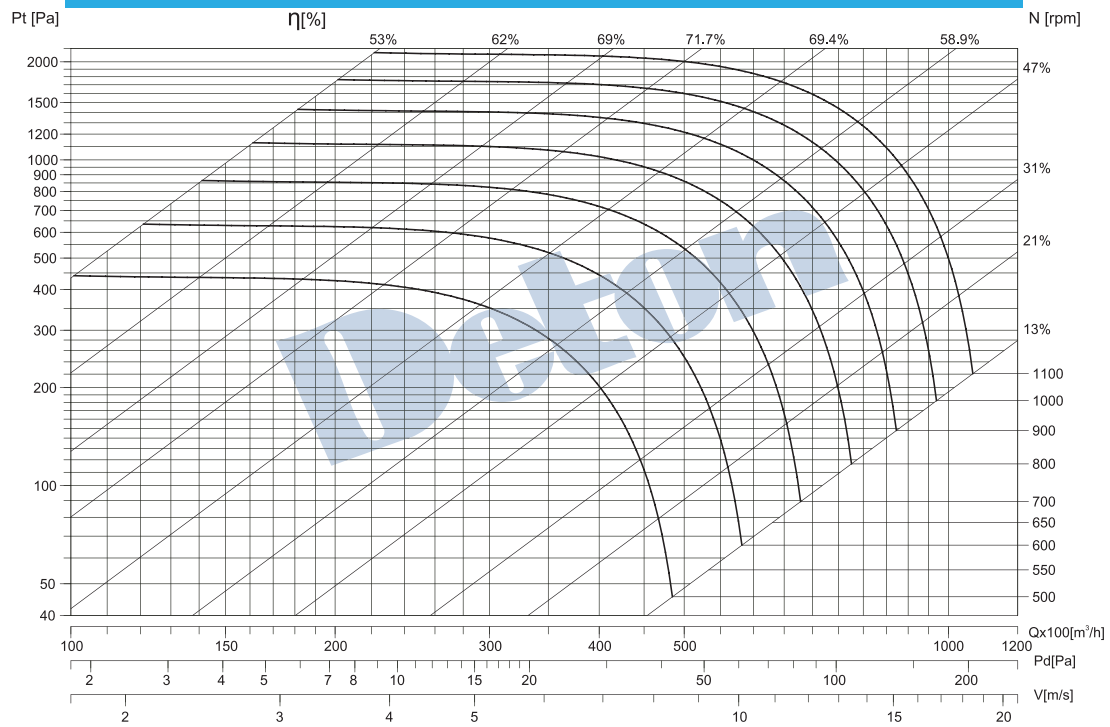

DT40-BF-I 性能参数表

序号	转速 (r/min)	工况点序号 (No)	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
1	550	1	11000	534	532	67.4	7.5kW	Y160M-6
		2	17600	525	520	65.9		
		3	24200	506	495	65.7		
		4	30800	452	435	66.3		
		5	37400	361	336	67.4		
		6	44000	244	209	68.1		
2	700	1	14000	865	861	71.9	15kW	Y180L-6
		2	22400	851	842	70.4		
		3	30800	819	802	70.2		
		4	39200	732	704	70.8		
		5	47600	585	544	71.9		
		6	56000	396	339	72.6		
3	750	1	15000	993	989	73.4	18.5kW	Y200L ₁ -6
		2	24000	977	966	71.9		
		3	33000	941	921	71.7		
		4	42000	840	808	72.3		
		5	51000	672	625	73.4		
		6	60000	454	390	74.1		
4	800	1	16000	1130	1125	74.8	22kW	Y200L ₂ -6
		2	25600	1111	1099	73.3		
		3	35200	1070	1048	73.1		
		4	44800	956	920	73.7		
		5	54400	764	711	74.8		
		6	64000	517	443	75.5		
5	900	1	18000	1430	1424	77.3	30kW	Y200L-4
		2	28800	1406	1392	75.8		
		3	39600	1354	1326	75.6		
		4	50400	1210	1164	76.3		
		5	61200	967	900	77.4		
		6	72000	654	561	78.1		
6	1000	1	20000	1765	1758	79.6	37kW	Y225S-4
		2	32000	1736	1718	78.1		
		3	44000	1672	1637	77.9		
		4	56000	1493	1437	78.6		
		5	68000	1194	1111	79.7		
		6	80000	808	693	80.4		
7	1050	1	21000	1946	1938	80.7	45kW	Y225M-4
		2	33600	1914	1894	79.2		
		3	46200	1843	1805	79		
		4	58800	1646	1584	79.6		
		5	71400	1316	1225	80.7		
		6	84000	891	764	81.4		

拒绝虚假



DT-BF-II双速风机性能参数 (表一)

序号	转速 (r/min)	工况点序 号	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
DT15-BF	2200	1	4583	1360	1345	77	4.7/1.5	YDT132S-4/6
		2	8250	1170	1122			
		3	11917	597	496			
	1470	1	3063	607	601	68		
		2	5513	522	501			
		3	7963	266	222			
DT15-BF	2200	1	4583	1360	1345	77	4.5/2.2	YDT132M ₂ -6/8
		2	8250	1170	1122			
		3	11917	597	496			
	1650	1	3438	765	757	70.5		
		2	6188	658	631			
		3	8938	336	279			
DT18-BF	1800	1	5000	1153	1142	77	4.7/1.5	YDT132S-4/6
		2	9000	1060	1024			
		3	14000	554	467			
	1200	1	3333	513	508	68		
		2	6000	471	455			
		3	9333	246	207			
DT18-BF	1800	1	5000	1153	1142	77	4.5/2.2	YDT132M ₂ -6/8
		2	9000	1060	1024			
		3	14000	554	467			
	1350	1	3750	649	643	70.5		
		2	6750	596	576			
		3	10500	311	262			
DT20-BF	1900	1	6333	1633	1622	82	9.5/3.1	YDT160M-4/6
		2	14778	1397	1335			
		3	21110	765	641			
	1270	1	4233	730	725	73.5		
		2	9878	624	597			
		3	14111	342	286			
DT20-BF	1700	1	5667	1307	1298	80	6.5/3.2	YDT160M-6/8
		2	13222	1118	1069			
		3	18889	613	513			
	1270	1	4233	730	725	73.5		
		2	9878	624	597			
		3	14111	342	286			
DT22-BF	1700	1	8500	1630	1617	82	12/4	YDT160L-4/6
		2	17000	1460	1408			
		3	25500	801	685			
	1150	1	5750	746	740	74		
		2	11500	668	645			
		3	17250	366	313			
DT22-BF	1550	1	7750	1355	1344	80	9/4.5	YDT160L-6/8
		2	15500	1214	1171			
		3	23250	666	569			
	1150	1	5750	746	740	74		
		2	11500	668	645			
		3	17250	366	313			
DT25-BF	1600	1	11429	1807	1792	83	18/6.2	YDT180L-4/6
		2	22857	1647	1587			
		3	36571	697	546			
	1070	1	7643	808	801	74		
		2	15286	736	710			
		3	24457	312	244			

DT-BF 系列




参数实测

DT-BF-II 双速风机性能参数 (表二)


序号	转速 (r/min)	工况点 序号	风量 (m³/h)	全压 (Pa)	静压 (Pa)	噪声 dB (A)	电机功率 (kW)	电机型号
DT25-BF	1450	1	10358	1484	1472	80.5	13/6.5	YDT180L-6/8
		2	20714	1352	1304			
		3	33142	572	448			
	1070	1	7643	808	801	74		
		2	15286	736	710			
		3	24457	312	244			
DT28-BF	1300	1	11818	1513	1503	81	18/6.2	YDT180L-4/6
		2	26000	1341	1293			
		3	40182	679	564			
	870	1	7909	678	673	72		
		2	17400	601	579			
		3	26891	304	253			
DT28-BF	1150	1	10454	1184	1176	78.5	13/6.5	YDT180L-6/8
		2	23000	1050	1012			
		3	35546	532	442			
	870	1	7909	678	673	72		
		2	17400	601	579			
		3	26891	304	253			
DT32-BF	1200	1	16000	1633	1621	81	24/8.5	YDT200L-4/6
		2	32000	1503	1457			
		3	53333	642	513			
	800	1	10667	726	721	72.5		
		2	21333	668	648			
		3	35556	285	228			
DT32-BF	1300	1	17333	1916	1903	83	30/15	YDT225M-6/8
		2	34667	1764	1710			
		3	57778	753	602			
	970	1	12933	1067	1059	76.5		
		2	25867	982	952			
		3	43111	419	335			
DT36-BF	1150	1	25091	1887	1869	81	38/13	YDT225M-4/6
		2	50182	1571	1500			
		3	71091	781	638			
	770	1	16800	846	838	73		
		2	33600	704	673			
		3	47600	350	286			
DT36-BF	1200	1	26182	2055	2035	82	45/22	YDT280S-6/8
		2	52364	1711	1634			
		3	74182	851	695			
	900	1	19636	1156	1145	76		
		2	39273	963	919			
		3	55636	478	391			
DT40-BF	1050	1	33600	1914	1894	81.5	47/16	YDT250M-4/6
		2	58800	1646	1584			
		3	84000	891	764			
	700	1	22400	851	842	72.5		
		2	39200	732	704			
		3	56000	396	339			
DT40-BF	1050	1	33600	1914	1894	81.5	45/22	YDT280S-6/8
		2	58800	1646	1584			
		3	84000	891	764			
	780	1	24960	1056	1045	75		
		2	43680	908	874			
		3	62400	491	421			

外形安装尺寸示意图


图一：A型、C型 (9"–20")

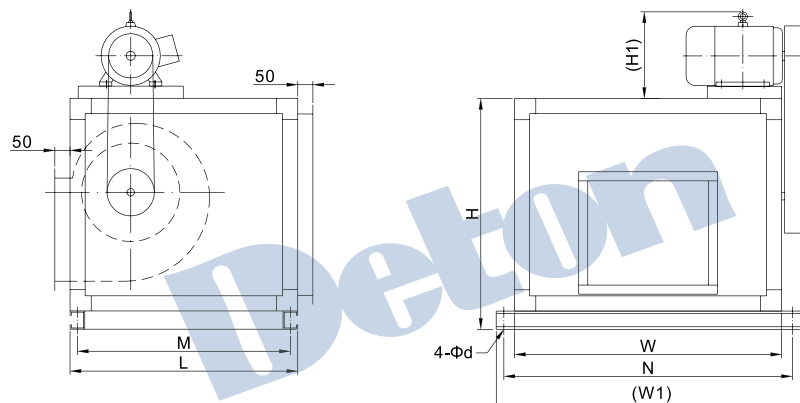


图二：A型、C型 (22"–30")

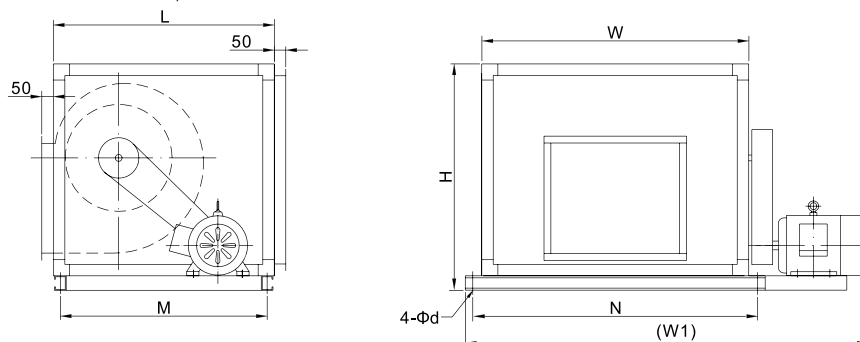

图三：A型、C型 (32"–40")

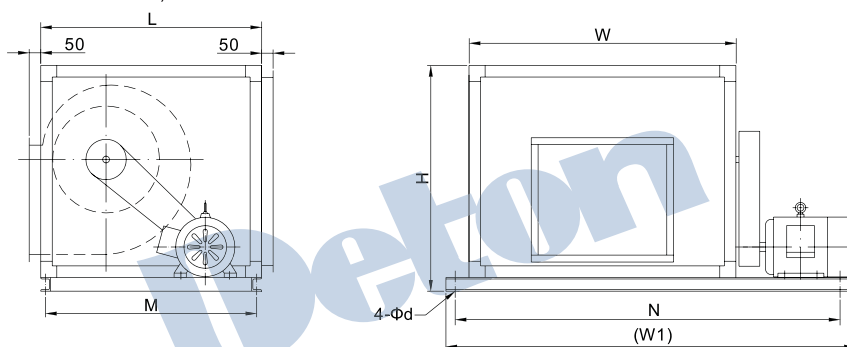

图四：B型 (9"–40")

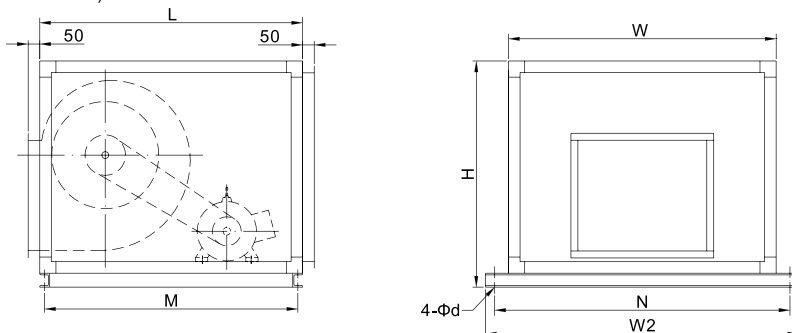




参数实测

外形安装尺寸

机号	外形尺寸							基础尺寸				重量 (kg)			
	L		W	W1 (max.)	W2	H	H1 (max.)	A 型、C 型		B 型		Φd	A 型	B 型	C 型
	A 型、 C 型	B 型						M	N	M	N				
9"	650	850	680	840	840	720	300	570	780	770	780	Φ16	92	90	90
10"	700	950	750	910	910	780	350	620	850	870	850	Φ16	103	100	100
12"	780	1000	880	1060	1040	840	360	700	980	920	980	Φ16	115	110	110
14"	850	1100	930	1110	1090	920	440	770	1030	1020	1030	Φ16	115	110	110
15"	950	1140	980	1160	1140	970	440	870	1080	1060	1080	Φ16	150	143	143
18"	1050	1220	1160	1350	1320	1070	440	970	1260	1140	1260	Φ16	218	210	210
20"	1150	1320	1320	1530	1520	1160	510	1070	1440	1240	1440	Φ16	296	289	289
22"	1250	1400	1400	2180	1600	1270	\	1170	1520	1320	1520	Φ16	360	352	352
25"	1400	1540	1520	2370	1720	1380	\	1320	1640	1460	1640	Φ16	405	395	395
28"	1550	1680	1700	2550	1900	1540	\	1470	1820	1600	1820	Φ16	530	520	520
32"	1900	2000	1900	3045	2100	1845	\	1820	2900	1920	2000	Φ20	920	900	900
36"	2050	2220	2050	3260	2250	2045	\	1970	3100	2140	2150	Φ20	1146	1120	1120
40"	2200	2350	2200	3410	2400	2215	\	2120	3250	2270	2300	Φ20	1430	1390	1390

- 说明: 1. 上表中重量数据不包含电机重量, 风机总重量等于上表中所示重量加上配用电机的重量。电机重量数据可在电机重量表中查得。
2. 表中 W1、H1 的数据是最大数值, 配用不同功率电机时此数值不等, 但不会大于表中所示值。
3. 图中所示是 (1) 号风口方向的外形安装尺寸, 其它风口方向的数据需另外提供。
4. 地脚安装尺寸仅供参考, 不能作为精确定位用。

进风口法兰尺寸

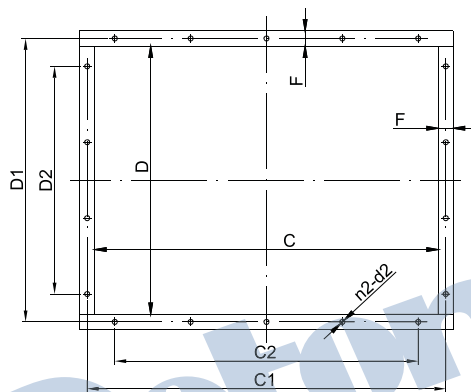


机号	进风口							
	C	C1	C2	D	D1	D2	F	n2-d2
9"	575	605	180x3=540	535	565	200x2=400	30	14-Φ7
10"	645	675	180x3=540	595	625	210x2=420	30	14-Φ7
12"	775	805	185x4=740	655	685	180x3=540	30	18-Φ7
14"	825	855	190x4=760	735	765	200x3=600	30	18-Φ7
15"	875	905	195x4=780	785	815	210x3=630	30	18-Φ7
18"	1055	1085	235x4=940	885	915	200x4=800	30	20-Φ7
20"	1215	1255	220x5=1100	975	1015	220x4=880	40	22-Φ9
22"	1295	1335	230x5=1150	1085	1125	200x5=1000	40	24-Φ9
25"	1415	1455	215x6=1290	1195	1235	215x5=1075	40	26-Φ9
28"	1595	1635	245x6=1470	1355	1395	245x5=1225	40	26-Φ9
32"	1795	1845	280x6=1680	1575	1625	270x5=1350	50	26-Φ11
36"	1945	1995	280x6=1680	1775	1825	270x6=1620	50	28-Φ11
40"	2095	2145	300x6=1800	1945	1995	300x6=1800	50	28-Φ11

说明: 表中进风口尺寸是 (1)、(12) 号风口方向的数据, 其余风口方向的数据需另外提供。

拒绝虚假



出风口法兰尺寸

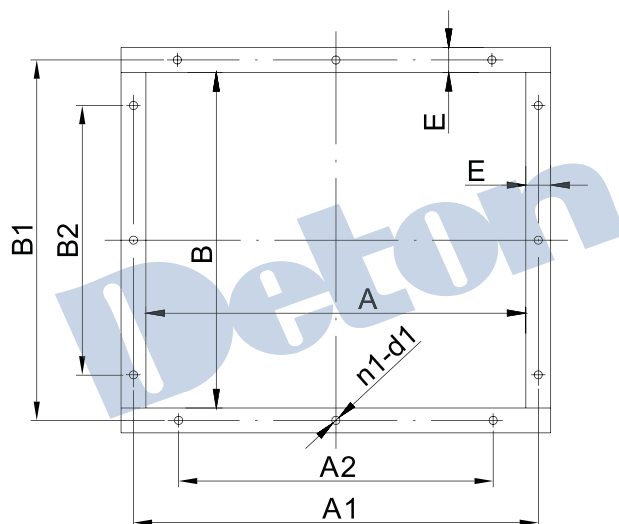

DT-BF 系列

机号	DT-BF 后倾系列出风口							
	A	A1	A2	B	B1	B2	E	n1-d1
DT9-BF	324	354	130 × 2=260	324	354	130 × 2=260	30	12-Φ7
DT10-BF	363	393	160 × 2=320	363	393	160 × 2=320	30	12-Φ7
DT12-BF	406	436	120 × 3=360	406	436	120 × 3=360	30	16-Φ7
DT14-BF	454	484	140 × 3=420	454	484	140 × 3=420	30	16-Φ7
DT15-BF	509	539	150 × 3=450	509	539	145 × 3=435	30	16-Φ7
DT18-BF	571	601	180 × 3=540	571	601	165 × 3=495	30	16-Φ7
DT20-BF	641	681	210 × 3=630	641	681	180 × 3=540	40	20-Φ9
DT22-BF	717	757	170 × 4=680	717	757	150 × 4=600	40	20-Φ9
DT25-BF	803	843	190 × 4=760	803	843	170 × 4=680	40	20-Φ9
DT28-BF	901	941	205 × 4=820	901	941	205 × 4=820	40	20-Φ9
DT32-BF	1010	1070	230 × 4=920	1010	1070	230 × 4=920	50	20-Φ11
DT36-BF	1132	1192	260 × 4=1040	1132	1192	260 × 4=1040	50	20-Φ11
DT40-BF	1268	1328	300 × 4=1200	1268	1328	300 × 4=1200	50	20-Φ11

电机重量表

电机型号	ZBA6322	ZBA6332	Y801-2	Y802-2	Y90S-2	Y90L-2	Y100L-2	Y112M-2	Y132S1-2	Y132S2-2	Y160M1-2	Y160M2-2
功率 (kW)	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15
电机重量 (kg)	7	8	16	17	22	25	34	45	66	71	121	131
电机型号	Y801-4	Y802-4	Y90S-4	Y90L-4	Y100L1-4	Y100L2-4	Y112M-4	Y132S-4	Y132M-4	Y160M-4	Y160L-4	Y180M-4
功率 (kW)	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5
电机重量 (kg)	17	18	22	27	33	38	49	67	80	126	139	180
电机型号	Y180L-4	Y200L-4	Y225S-4	Y225M-4	Y160M-6	Y160L-6	Y180L-6	Y200L1-6	Y200L2-6	Y225M-6	Y250M-6	Y280S-6
功率 (kW)	22	30	37	45	75	22	15	18.5	22	30	37	45
电机重量 (kg)	198	258	303	338	121	139	185	235	250	303	403	527

圖一：



1. 因双速电机有几种不同的接法，以上提供的是最常见的两种电机接法的配电柜电路原理图，客户应根据实际电机的接法选择相应的电路原理图。
2. 以上资料仅供参考，客户设计时请咨询相关专业人士。